

**Features**

- Low capacitance for high speed interfaces
- Ultra low leakage: nA level
- Low operating voltage: 6V
- Ultra low clamping voltage
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge: ±30kV  
Contact discharge: ±30kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 80A (8/20µs)
- RoHS Compliant

**Description**


The ESD0621XB is a low capacitance TVS array, integrating low capacitance, surge-rated compensation diodes with a high power transient voltage suppressor (TVS). The compensation diodes are arranged in a bridge pattern allowing the device to be connected in common mode and/or differential mode. The ESD0621XB complies with the IEC 61000-4-2 (ESD) standard with ±15kV air and ±8kV contact discharge. It is assembled into a 10-pin lead-free DFN package, the ESD0621XB is rated for GR-1089, intra-building transient immunity requirements for telecommunication installations and provide overvoltage protection for applications such as 10/100/1000 BaseT Ethernet and T3/E3 interfaces.

**Applications**


- T3/E3
- 10/100/1000 Ethernet
- Integrated Magnetics
- Carrier Class Equipment
- Customer Premise Equipment
- ISDN Interfaces

**Mechanical Characteristics**

- Package: DFN2626-10
- Lead Finish: NiPdAu
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram



**Dimensions and Pin Configuration**

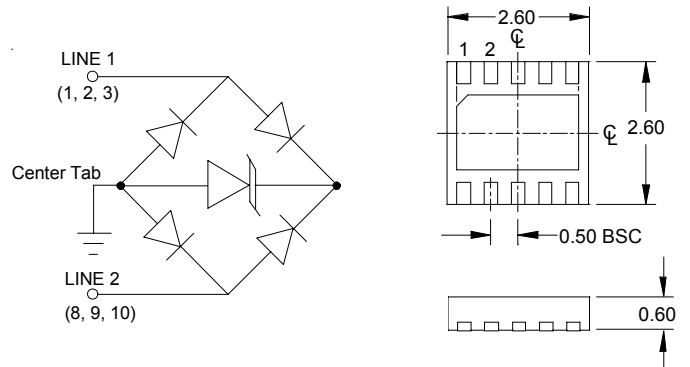

Circuit Diagram

Package Configuration

**Part Number Code**

<b>E</b>	<b>S</b>	<b>D</b>	<b>0</b>	<b>5</b>	<b>1</b>	<b>1</b>	<b>L</b>	<b>1</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>

Product Type	
ESD	TSK Electrostatic suppressor ESD Type

Reverse Working Voltage (V)	
3V3	3.3V
05	5V
16	16V

Line	
1	1-Line
2	2-Line
3	3-Line

Capacitance Type	
L	Low
X	Normal

directional	
0	Bi
1	Uni

Size	
1	0201
2	0402
3	DFN0603
4	DFN1006

★ Code 4 to 9 is optional

Specifications are subject to change without notice


### Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (2/10 $\mu\text{s}$ )	Ppk	2000	W
Peak Pulse Current (2/10 $\mu\text{s}$ )	I <sub>PP</sub>	100	A
Peak Pulse Current (8/20 $\mu\text{s}$ )	I <sub>PP</sub>	80	A
ESD per IEC 61000-4-2 (Air)	VESD	$\pm 30$	kV
ESD per IEC 61000-4-2 (Contact)		$\pm 30$	
Operating Temperature Range	T <sub>J</sub>	-40 to +85	$^{\circ}\text{C}$
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	$^{\circ}\text{C}$


### Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V <sub>RWM</sub>			6	V	
Reverse Breakdown Voltage	V <sub>BR</sub>	6.8			V	I <sub>T</sub> = 1mA
Reverse Leakage Current	I <sub>R</sub>			5	$\mu\text{A}$	V <sub>RWM</sub> = 6V
Clamping Voltage	V <sub>C</sub>			20	V	I <sub>PP</sub> = 100A (2 x 10 $\mu\text{s}$ pulse), any I/O pin to ground
Clamping Voltage	V <sub>C</sub>			25	V	I <sub>PP</sub> = 100A (2 x 10 $\mu\text{s}$ pulse), between I/O pins
Junction Capacitance	C <sub>J</sub>			20	pF	V <sub>R</sub> = 0V, f = 1MHz, between I/O pins and ground
Junction Capacitance	C <sub>J</sub>			10	pF	V <sub>R</sub> = 0V, f = 1MHz, between I/O pins


Typical Performance Characteristics (TA=25°C unless otherwise Specified)

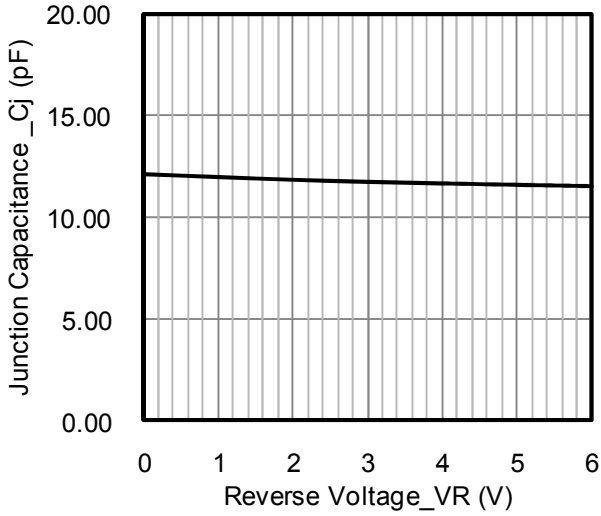


Junction Capacitance vs. Reverse Voltage

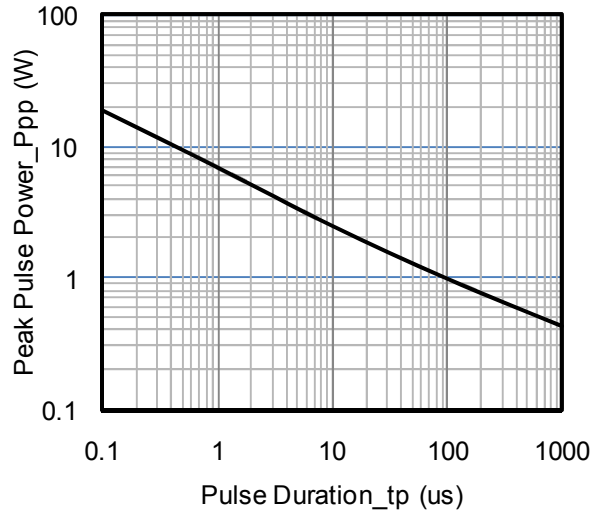


Peak Pulse Power vs. Pulse Time

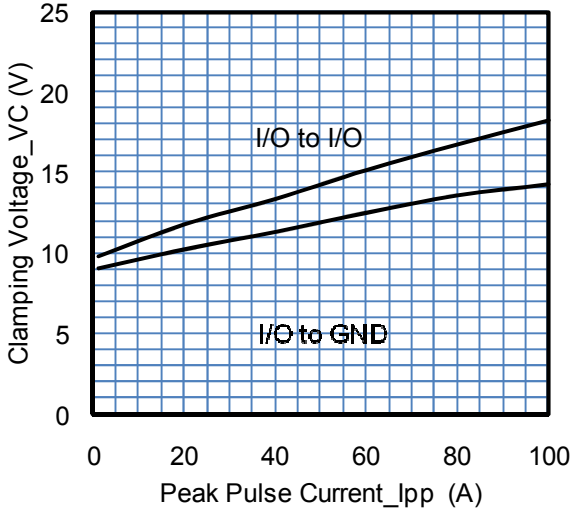


Clamping Voltage vs. Peak Pulse Current

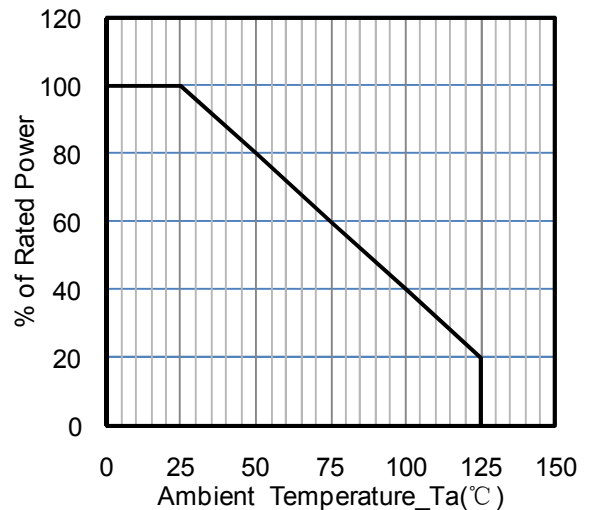

Power Derating Curve

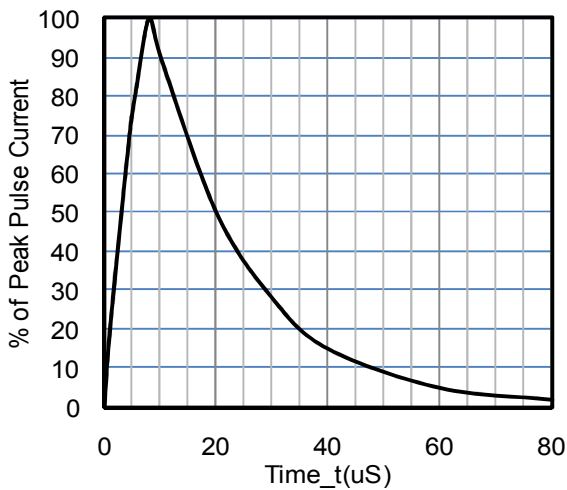


8 X 20us Pulse Waveform

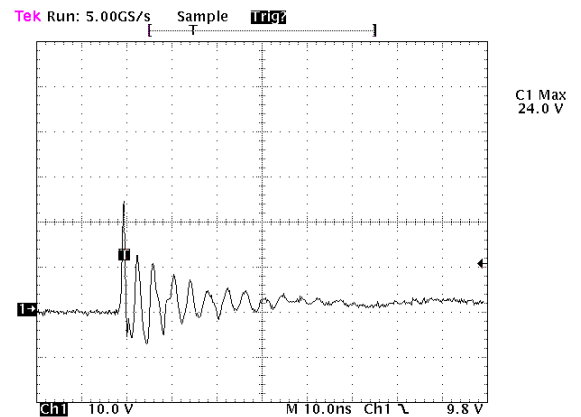

ESD Clamping Voltage

8 kV Contact per IEC61000-4-2


DFN2626-10 Package Outline Drawing

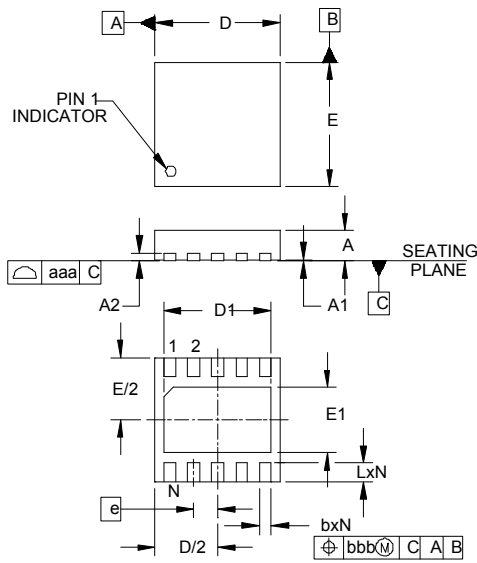

DIM	DIMENSIONS					
	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.020	.022	.024	0.50	0.55	0.60
A1	.000	.001	.002	0.00	0.03	0.05
A2		(.007)			(0.17)	
b	.007	.010	.012	0.20	0.25	0.30
D	.098	.102	.106	2.50	2.60	2.70
D1	.079	.085	.089	2.00	2.15	2.25
E	.098	.102	.106	2.50	2.60	2.70
E1	.044	.050	.054	1.11	1.26	1.36
e		.020 BSC			0.50 BSC	
L	.011	.014	.016	0.30	0.35	0.40
N		10			10	
aaa		.003			0.08	
bbb		.004			0.10	

- NOTES:
1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
  2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

Suggested Land Pattern

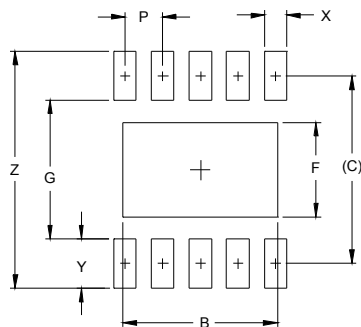

DIM	DIMENSIONS	
	INCHES	MILLIMETERS
B	.081	2.05
C	.100	2.50
F	.050	1.26
G	.073	1.85
P	.020	0.50
X	.012	0.30
Y	.025	0.65
Z	.124	3.15

- NOTES:
1. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY. CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR COMPANY'S MANUFACTURING GUIDELINES ARE MET.

Ordering Information

Part Number	Packaging	Reel Size
ESD0621XB	3000/Tape & Reel	7 inch