

**Features**

- 500W peak pulse power (8/20µs)
- Protects one data or power line
- Ultra low leakage: nA level
- Operating voltage: 3.3V
- Ultra low clamping voltage
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge: ±30kV  
Contact discharge: ±30kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
- RoHS Compliant

**Mechanical Characteristics**

- Package: SOD-323
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram

**Applications**

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Peripherals
- Pagers Peripherals
- Desktop and Servers

**Part Number Code**

<b>E</b>	<b>S</b>	<b>D</b>	<b>0</b>	<b>5</b>	<b>1</b>	<b>1</b>	<b>L</b>	<b>1</b>
<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>

Product Type	
ESD	TSK Electrostatic suppressor ESD Type

Reverse Working Voltage (V)	
3V3	3.3V
05	5V
16	16V

Line	
1	1-Line
2	2-Line
3	3-Line

Capacitance Type	
L	Low
X	Normal

directional	
0	Bi
1	Uni

Size	
1	O201
2	O402
3	DFN0603
4	DFN1006


★ Code 4 to 9 is optional

**Description**

The ESD3V310XG is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebook computers and PDA's, using monolithic silicon technology to provide fast response time and ultra low ESD clamping voltage, making this device an ideal solution for protecting sensitive semiconductor components from damage. The ESD3V310XG complies with the IEC-61000-4-2 (ESD) standard with ±15kV air and ±8kV contact discharge. The ESD3V310XG is assembled into a lead-free SOD323 package and will protect one unidirectional line. These devices will fit on the same PCB pad area as an 0805 MLV device.



**Dimensions and Pin Configuration**

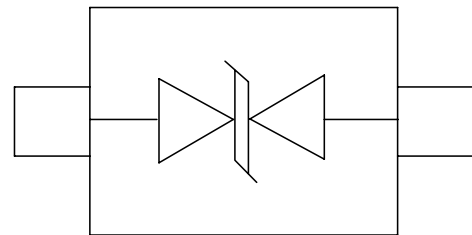

SOD-323


### Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	Ppk	500	W
Peak Pulse Current (8/20 $\mu\text{s}$ )	I <sub>PP</sub>	30	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V <sub>ESD</sub>	$\pm 30$ $\pm 30$	kV
Operating Temperature Range	T <sub>J</sub>	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	$^{\circ}\text{C}$


### Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V <sub>RWM</sub>			3.3	V	
Breakdown Voltage	V <sub>BR</sub>	4.2		6.0	V	I <sub>T</sub> = 2 $\mu\text{A}$
Reverse Leakage Current	I <sub>R</sub>			0.5	$\mu\text{A}$	V <sub>RWM</sub> = 3.3V
Clamping Voltage	V <sub>C</sub>			9	V	I <sub>PP</sub> = 5A (8 x 20 $\mu\text{s}$ pulse)
Clamping Voltage	V <sub>C</sub>			17	V	I <sub>PP</sub> = 30A (8 x 20 $\mu\text{s}$ pulse)
Junction Capacitance	C <sub>J</sub>			200	pF	V <sub>R</sub> = 0V, f = 1MHz


Typical Performance Characteristics (TA=25°C unless otherwise Specified)

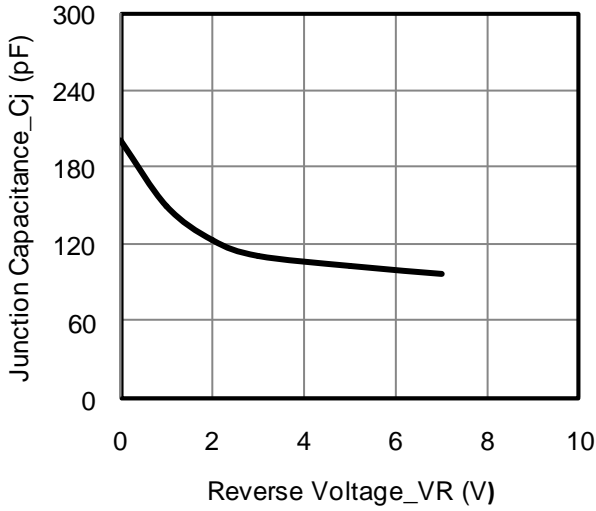


Junction Capacitance vs. Reverse Voltage

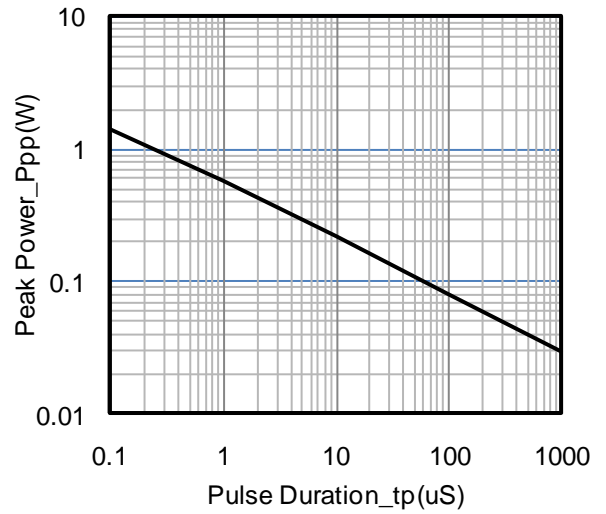


Peak Pulse Power vs. Pulse Time

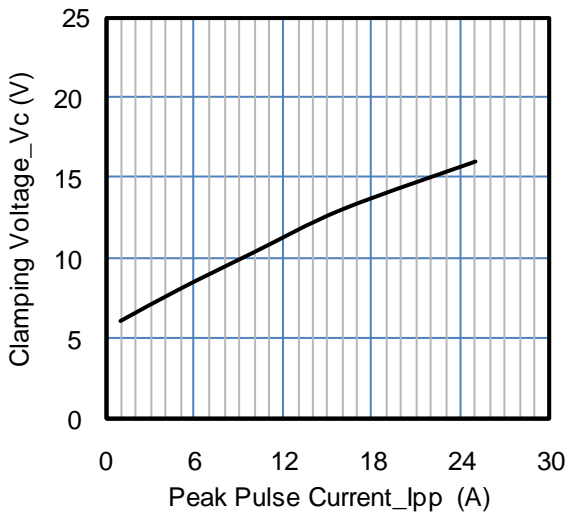


Clamping Voltage vs. Peak Pulse Current

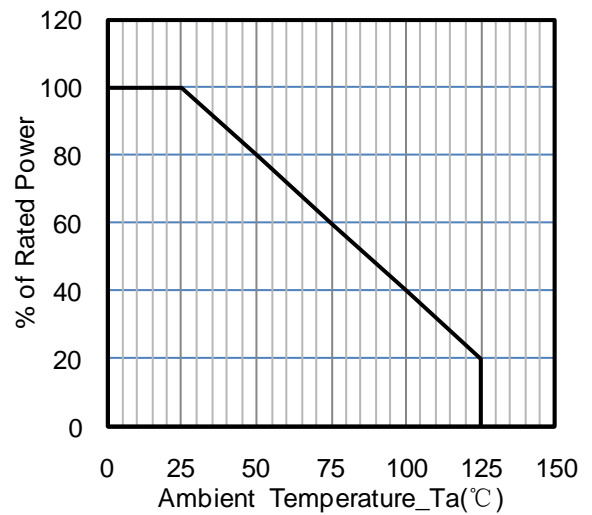

Power Derating Curve

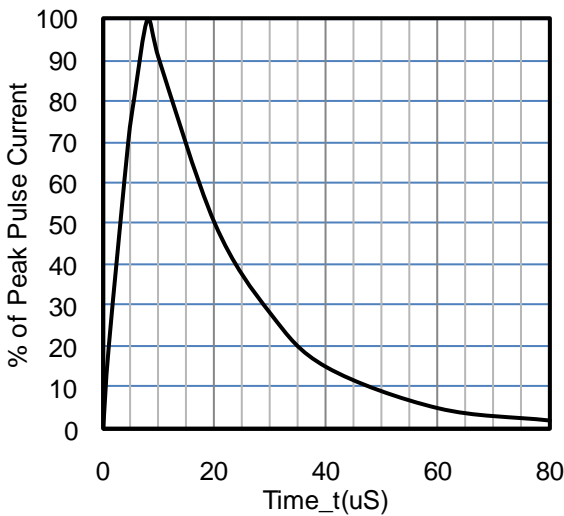


8 X 20uS Pulse Waveform

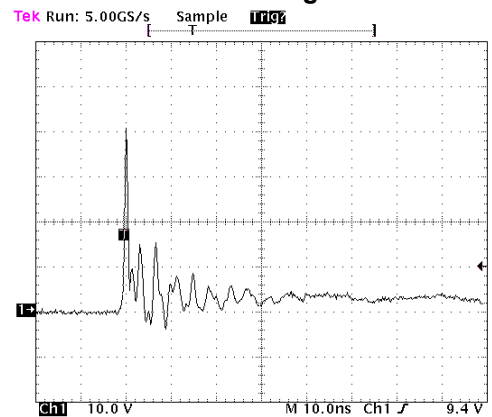

ESD Clamping Voltage


8kV Contact Per IEC61000-4-2

SOD-323 Package Outline Drawing

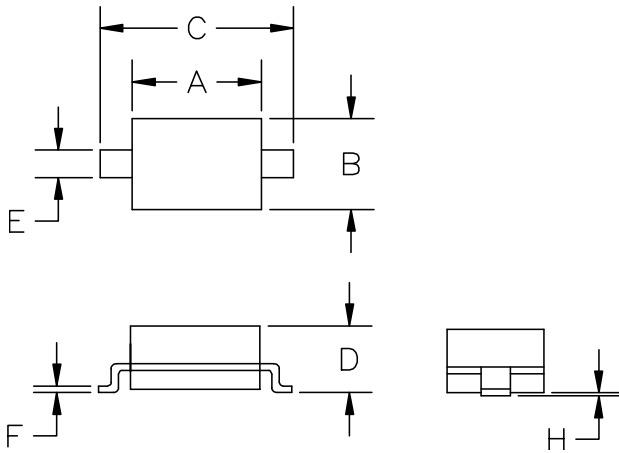

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.060	0.071
B	1.20	1.40	0.045	0.054
C	2.30	2.70	0.090	0.107
D	-	1.10	-	0.043
E	0.30	0.40	0.012	0.016
F	0.10	0.25	0.004	0.010
H	-	0.10	-	0.004

Suggested Land Pattern

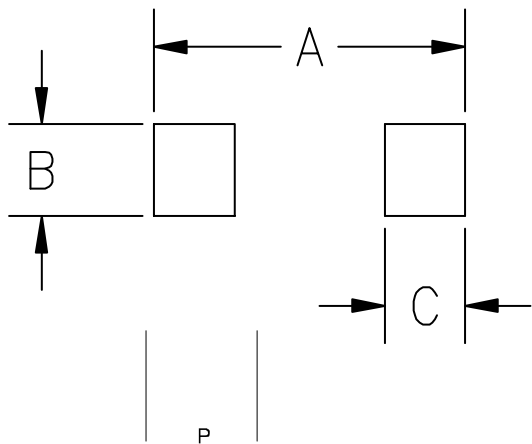

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
A	3.15	0.120
B	0.80	0.031
C	0.80	0.031

Ordering Information

Part Number	Packaging	Reel Size
ESD3V310XG	3000/Tape & Reel	7 inch