

Voltage Range 1600 to 2000 V

Current 1.0 Ampere

Features


- * Low forward voltage drop
- * High current capability
- * Low reverse leakage current
- * High surge current capability
- * Glass Passivated Junction

Mechanical Data

- * Case: Molded plastic DO-41
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solderable per MIL-STD-202 method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.34 gram

Dimensions in inches and (millimeters)

DO-41

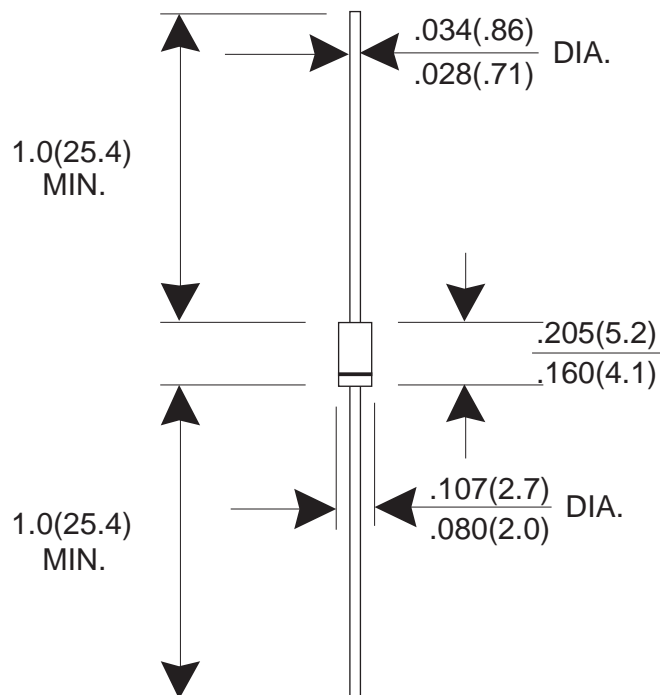

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

PARAMTER	SYMBOL	TEM513G	TEM516G	TEM518G	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	1600	1800	2000	V
Maximum RMS Voltage	VRMS	1120	1260	1400	V
Maximum DC Blocking Voltage	VDC	1600	1800	2000	V
Maximum Average Forward Rectified Current $T_L=75^{\circ}\text{C}$	I _O	1.0			A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30			A
Maximum Instantaneous Forward Voltage @ 1.0 A	V _F	1.1			V
Maximum DC Reverse Current @ $T_J=25^{\circ}\text{C}$ At Rated DC Blocking Voltage @ $T_J=100^{\circ}\text{C}$	I _R	5.0 50.0			uA uA
Typical junction Capacitance (Note 1)	C _J	10			pF
Typical Thermal Resistance (Note 2)	R _{θJA}	50			°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150			°C

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

(2) Thermal resistance form junction of ambient at 0.375"(9.5mm) lead lengths, P.C. board mounted.

RATING AND CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

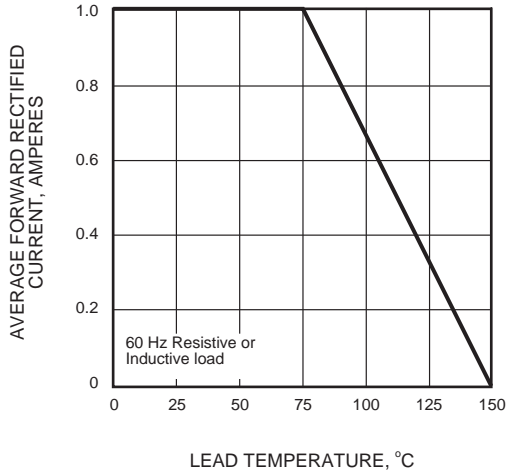


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

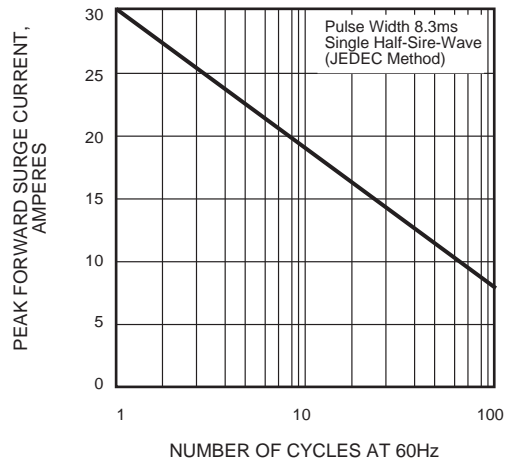


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


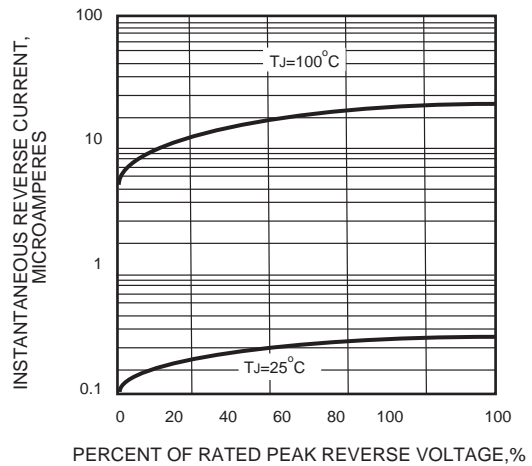


FIG.5 - TYPICAL JUNCTION CAPACITANCE

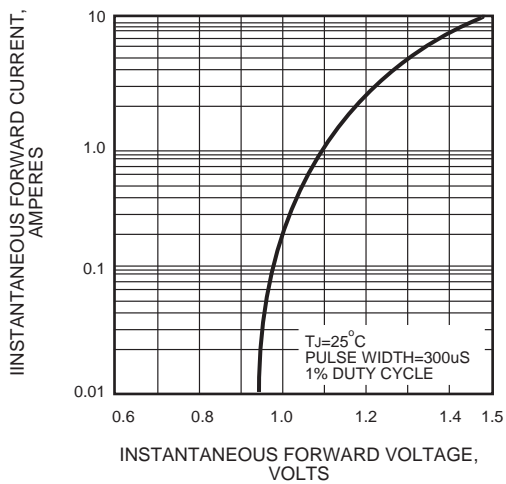