

Voltage Range 600 V
Current 60.0 Ampere

Features


- Fast switching for high efficiency
- Low noise
- Low reverse leakage current
- High voltage super FRD
- PFC application

Mechanical Data

- Case: Molded plastic TO-247-2L
- Epoxy: UL 94V-0 rate flame retardant ,
- Terminals: Solderable per MIL-STD-202 method 208
- Mounting position: Any
- Weight : 6.2 grams

Dimensions in inches and (millimeters)

TO-247-2L

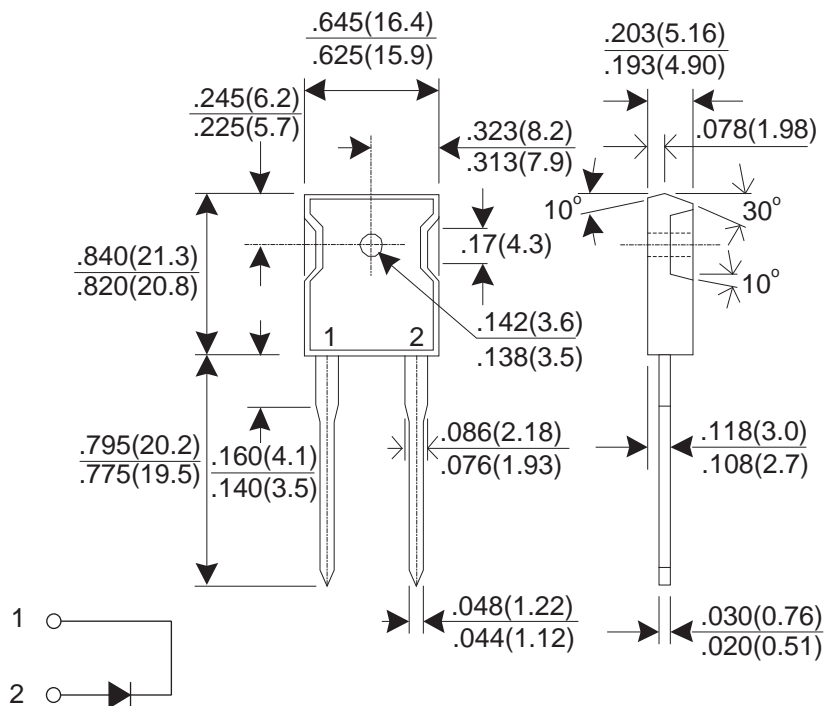

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

PARAMTER	SYMBOL	THFR60A06PD			UNIT
		Min.	Typ.	Max.	
Recurrent Peak Reverse Voltage	V _{RRM}	-	-	600	V
RMS Voltage	V _{RMS}	-	-	420	V
DC Blocking Voltage	V _{DC}	-	-	600	V
Average Forward Rectified Current T _c = 80 °C	I _{F(AV)}	-	-	60.0	A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	-	-	480	A
Instantaneous Forward Voltage @60A(25°C) @60A(150°C)	V _F	-	-	2.5 2.2	V
DC Reverse Current @T _J =25°C At Rated DC Blocking Voltage @T _J =150°C	I _R	-	-	250 1000	uA uA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	-	-	50	nS
Maximum Reverse Recovery Time (Note 2)	T _{rr}	-	-	80	nS
Typical junction Capacitance (Note 3)	C _J	-	80	-	pF
Typical Thermal Resistance (Note 4)	R _{θJC}	-	-	1.2	°CW
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-65	-	175	°C

NOTES : (1) Reverse recovery test conditions I_F = 0.5A , I_R = 1A , I_{rr} = 0.25A
 (2) Reverse recovery test conditions I_F = 15A, dI_F/dt = 100A/us.
 (3) Junction Capacitance test conditions : V_R = 10V, I_F = 0A.
 (4) Thermal Resistance junction to case.

RATING AND CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

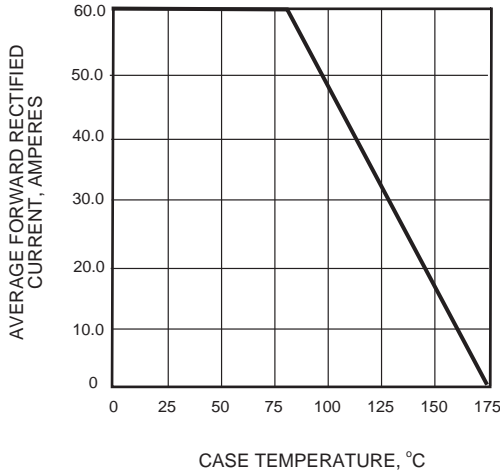


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

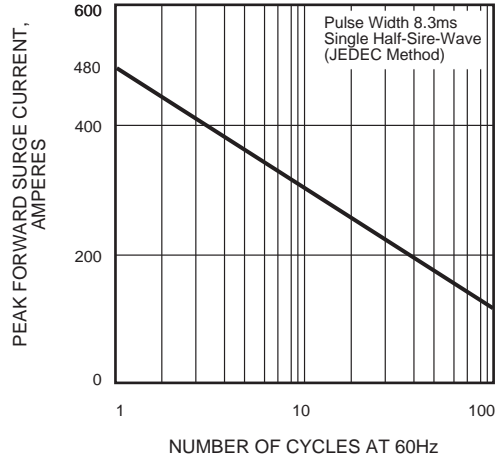


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

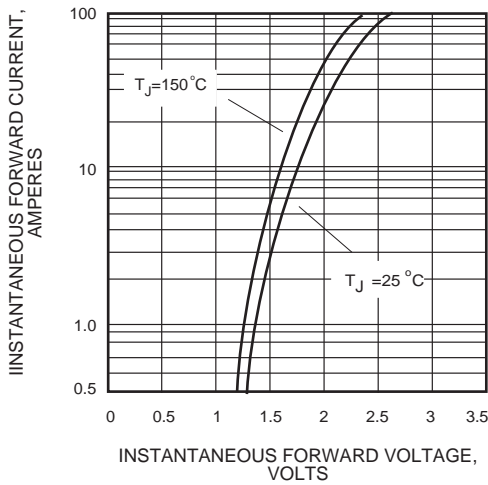


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

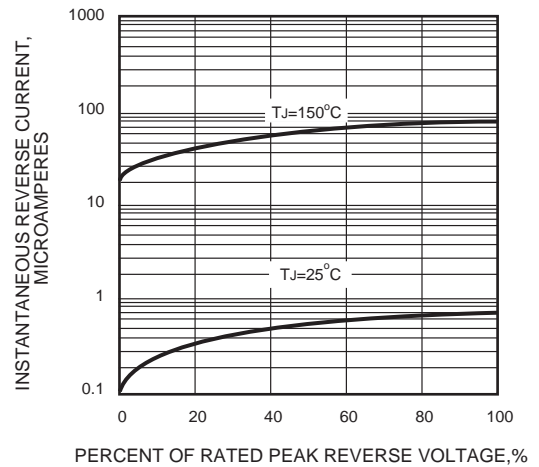


FIG.5 - T_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT


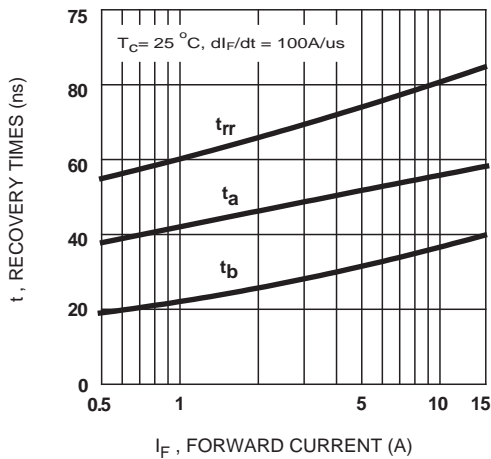


FIG.6 - TYPICAL JUNCTION CAPACITANCE

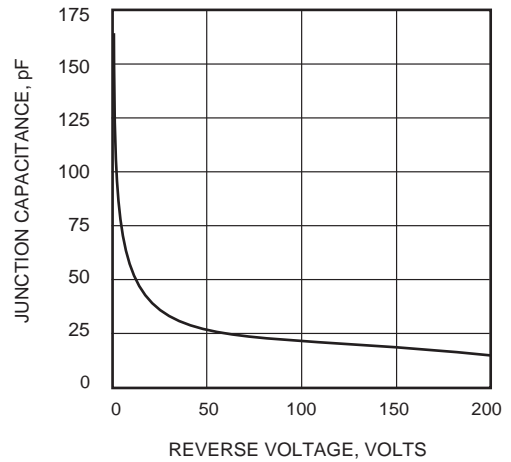

Test Circuits and Waveforms

FIG. 7 - t_{rr} TEST CIRCUIT

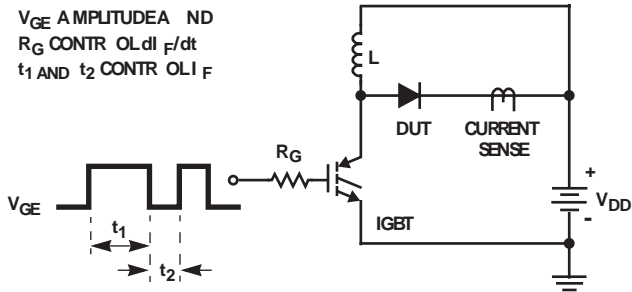


FIG. 8 - t_{rr} WAVEFORMS AND DEFINITIONS

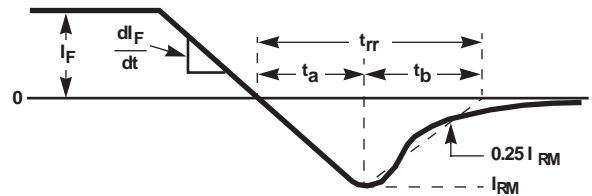


FIG. 9 - AVALANCHE ENERGY TEST CIRCUIT

$I_{MAX} = 1A$
 $L = 40mH$
 $R < 0.1$
 $E_{AVL} = 1/2LI^2 [V_{R(AVL)} / (V_{R(AVL)} - V_{DD})]$
 $Q_1 = IGBT (BV_{CES} > DUT V_{R(AVL)})$

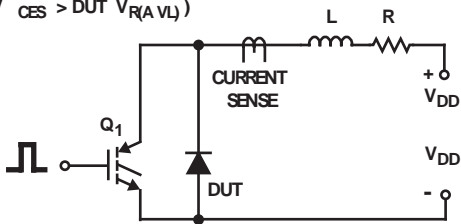


FIG. 10 - AVALANCHE CURRENT AND VOLTAGE WAVEFORMS

