

Voltage Range 50 to 1000 V
Current 1.5 Ampere

Features


- Fast switching for high efficiency
- Low forward voltage drop
- High current capability
- Low reverse leakage current
- High surge current capability

Mechanical Data

- Case: Molded plastic DO-201AD
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Solderable per MIL-STD-202 method 208 guaranteed
- Polarity: Color band denotes cathode
- Mounting position: Any
- Weight: 1.1 gram

Dimensions in inches and (millimeters)

DO-201AD

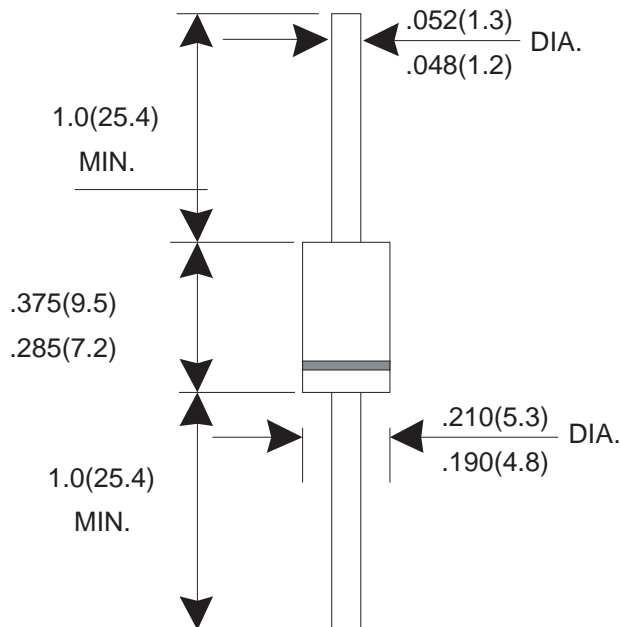

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	TUF 5400G	TUF 5401G	TUF 5402G	TUF 5403G	TUF 5404G	TUF 5406G	TUF 5407G	TUF 5408G	UNIT	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current T _L =55°C	I _{F(AV)}	3.0								A	
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150								A	
Maximum Instantaneous Forward Voltage @ 3.0 A	V _F	1.0					1.7				V
Maximum DC Reverse Current @T _J =25°C At Rated DC Blocking Voltage @T _J =125°C	I _R	5.0					100				uA uA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50					75				nS
Typical junction Capacitance (Note 2)	C _J	45					36				pF
Maximum Thermal Resistance (Note 3)	R _{θJA}	20								°CW	
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150								°C	

NOTES : (1) Reverse recovery test conditions I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A.
 (2) Thermal Resistance junction to lead.
 (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

RATING AND CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

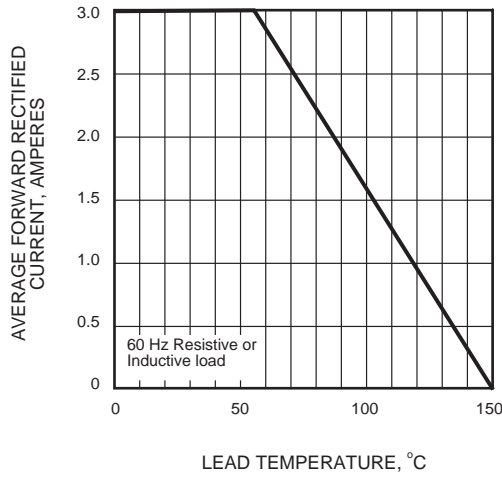


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

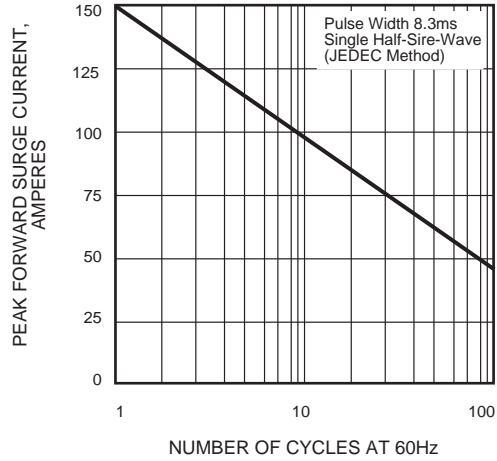


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

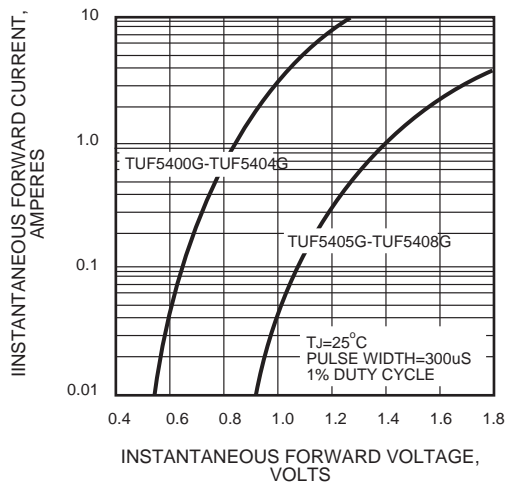


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

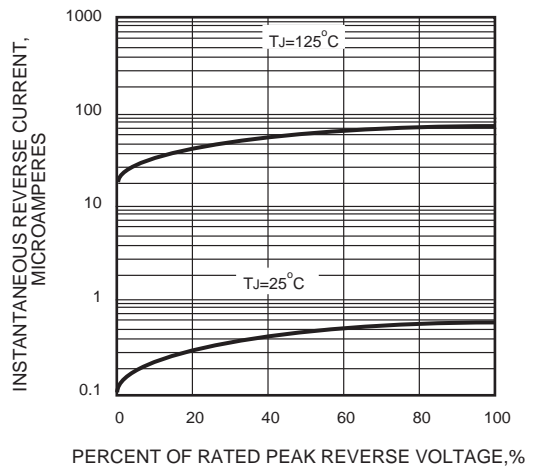


FIG.5 - TYPICAL JUNCTION CAPACITANCE

